

PG SERIES SELF-PRIMING POOL PUMP PG

- Use high quality polypropylene to make the pump more durable.
- Carbon with ceramics mechanical seal is more safe and stable.
- New design for the inner part improve the efficiency and reduce the noise.
- High performance motor with thermal protection
- The pump can bear 25000 times of impact test, excellent performance and reliable quality.

- 采用安全可靠的聚丙烯热塑性塑料作为水泵的主要材料，具有耐高温高压等特性。
- 轴封采用陶瓷碳素材料，耐磨损，安全稳定，密封性好，能够确保水泵长期稳定运行。
- 水泵内部件的新设计可以最大程度提高水泵的效率并降低噪音。
- 采用高性能电机，扬程高，流量大，内置热保护器与过电流保护。
- 经过25000次严格的寿命测试与强力冲击测试，性能优异，质量可靠。


TECHNICAL PARAMETERS

型号 Model	功率 Motor Power (HP)	电压 Voltage (V)	转速 Frequency (RPM)	最大流量 Qmax (m³/h)	最大扬程 Hmax (mtr)	出入口口径 Connections (mm)	包装尺寸 Packing dimension(mm)		
							Length	Width	Height
39033	0.33	220-240	2850	8.5	8.1	48/50	530	180	260
39050	0.5	220-240	2850	11.0	10.2	48/50	530	180	260
39075	0.75	220-240	2850	13.0	10.8	48/50	530	180	260
39100	1.0	220-240	2850	16.5	11.2	60/63	530	180	260
39120	1.2	220-240	2850	19.0	12.4	60/63	530	180	260
39075-1	0.75	220/380	2850	15.3	14	48/50	630	230	340
39100-1	1.0	220/380	2850	17.6	16	48/50	630	230	340
39150-1	1.5	220/380	2850	22.5	17.5	48/50	630	230	340
39200-1	2.0	220/380	2850	27.9	18	60/63	630	230	340
39300-1	3.0	220/380	2850	32.1	19	60/63	630	230	340


39075-1~ 39300-1



39033 ~ 39120


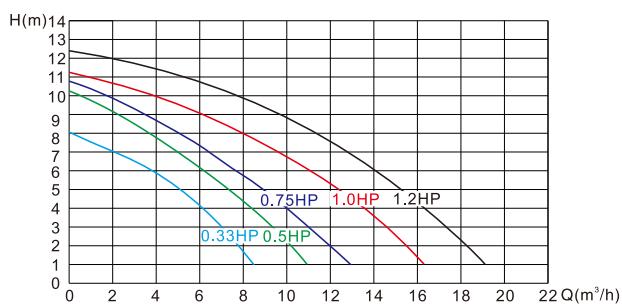


39033 ~ 39120


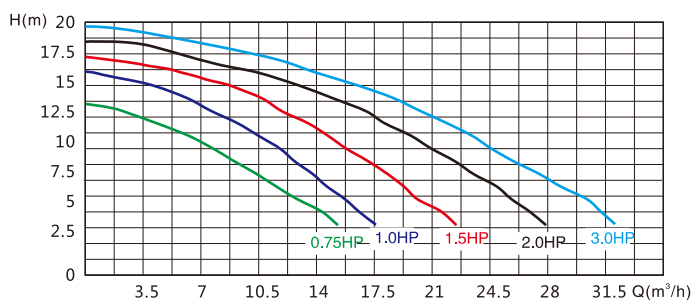


39075-1~ 39300-1

Model	A(mm)	B(mm)	C(mm)
39033	460	160	230
39050	460	160	230
39075	485	160	230
39100	485	160	230
39120	485	160	230
39075-1	595	200	295
39100-1	595	200	295
39150-1	605	200	295
39200-1	605	200	295
39300-1	605	200	295

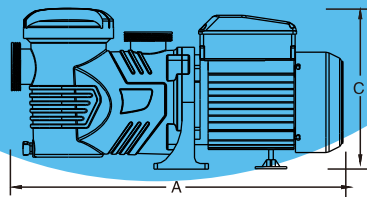

39033 ~ 39120

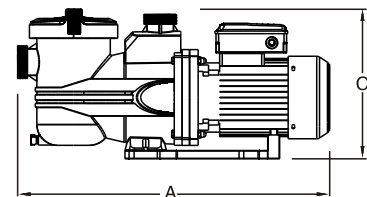

39075-1~ 39300-1