

CONCRETE POOL - WALL CONDUITS

Range of 300 mm long conduits for Ø 2" inlets and "Multiflow" models, that can easily be cut to required lengths depending on the pool wall thickness. Made in ABS. The flanged rib has 2 holes for positioning within the pool shell.

Rear 2" male thread and inside Ø 50 mm solvent socket



2" front female thread
for 2" male thread return

Ø 59.3 mm solvent internal for
returns suitable for gluing in to Ø 63 mm
6 bar pipe & light "MINI" 33684


Code	S standard Packaging	S standard Weight kg	S standard Volume m ³
15658	15	4.3	0.040
15661	15	4.2	0.040

Rear Ø 63 mm solvent weld and inside Ø 50 mm solvent weld

2" front female thread
for 2" male thread return

Front Ø 59.3 mm inner diameter for gluing
to Ø 63 mm. 6 bar pipe & light
"MINI" 33684

Code	S standard Packaging	S standard Weight kg	S standard Volume m ³
15659	15	4.2	0.040
15660	15	5.6	0.040

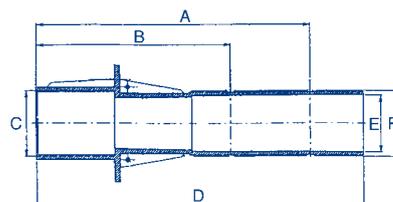

Dimensions	Models			
	15658	15661	15659	15660
A	250	250	250	250
B	175	175	175	175
C	2"	Ø59.3	2"	Ø59.3
D	300	300	300	300
E	Ø50	Ø50	Ø50	Ø50
F	2"	2"	Ø63	Ø63

•We reserve the right to change all or part of the features of the articles or contents of this document, without prior notice.