


Under Water Light

UWL With Niche Halogen

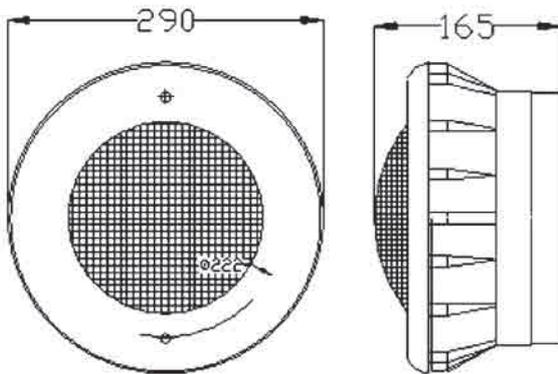

Code	Model	Front Plate	Bulbw	V	Diameter (mm)	Depth (mm)	Cable (m)
80201	Concrete	ABS	PAR56 300W	12	290	165	2,5
80202	Concrete	SS	PAR56 300W	12	290	165	2,5
80203	Liner	ABS	PAR56 300W	12	290	165	2,5
80204	Liner	SS	PAR56 300W	12	290	165	2,5

We reserve the right to change all or part of the features of the articles or contents of this document, without prior notice.

- Designed to be used fully submerged underwater in fresh water swimming pools
- Class III electric device with very low voltage for safety (12V with alternative current)
- IPX8 degree of protection at a nominal immersion depth of 2m
- Face plates available in both ABS and 316SS
- A PAR56 Halogen lamp included
- 2,5m long cable included
- Available for concrete and liner pools
- Easy to operate improving all the maintenance operations such as a lamp replacement
- Basic dimensions are: Diameter 290 mm Depth 165 mm

▪We reserve the right to change all or part of the features of the articles or contents of this document, without prior notice.