


PK Sand Filters

Fibreglass Sand Filters

- UV inhibited filament wound structural fiberglass tanks.
- Manual safety pressure release
- Large combination sand/water drain for easy winterizing.
- Sight glass for inspection of filtered water
- BP series filter: Bolt style top mount valve combines with the filter perfectly.
- BS series filter: Large clear lid is easy for interior viewing and media removal.
- DS series filter: Bolt type design makes the filter installation compactly

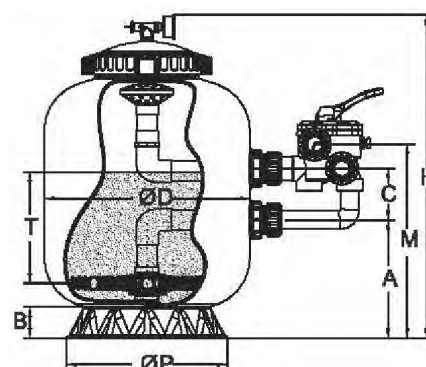

Logistics information

Mode	Tank Diameter (mm)	Tank Height (mm)	Design Flow (m3/h)	Filter Area (m2)	Connections (mm)	Sand Weight (kg)	Filter Packing (mm)		
							Length	Width	Height
30450	450	660	8	0.16	48/50	56	450	450	620
30500	500	745	10	0.2	48/50	90	500	500	660
30650	630	805	15	0.3	48/50	170	630	630	740
30700	700	885	18.5	0.38	48/50	225	700	700	830
30750	750	1000	22	0.44	60/63	300	775	775	940
30800	800	1020	25	0.5	60/63	380	800	800	960
30900	900	1120	30	0.64	60/63	450	900	900	1050
31000	1000	1140	35	0.79	60/63	710	1050	1020	1100
31100	1100	1280	44	0.95	60/63	980	1150	1150	1340
31200	1200	1385	50	1.13	60/63	1220	1250	1250	1350

Dimensions & Specifications

Mode	30450	30500	30650	30700	30750	30800	30900	31000	31100	31200
øD(mm)	450	550	630	700	750	800	900	1000	1100	1200
H(mm)	660	745	805	885	1000	1020	1110	1140	1280	1385
A(mm)	260	280	310	360	385	385	430	460	540	600
B(mm)	75	75	95	95	115	150	150	150	165	165
C(mm)	125	125	125	125	220	220	220	220	220	220
M(mm)	445	464	494	544	680	680	725	755	835	895
øP(mm)	390	390	565	565	655	790	790	790	980	980
T(mm)	250	280	300	350	410	420	480	510	560	600

▪We reserve the right to change all or part of the features of the articles or contents of this document, without prior notice.