


HJ-RC-SS110




HJ-RC-SS110L



Dimensions (unit: mm)

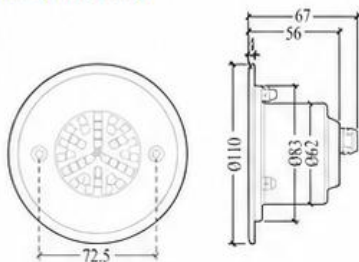


Dimensions (unit: mm)

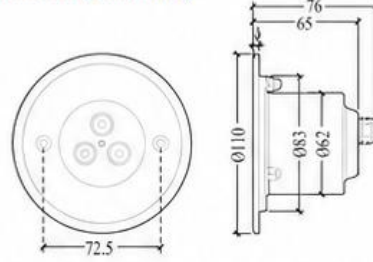


Installation Accessories

Concrete Pool Plastic Niche
HJ-RC-SS110-ABS/HJ-RC-SS110L-ABS

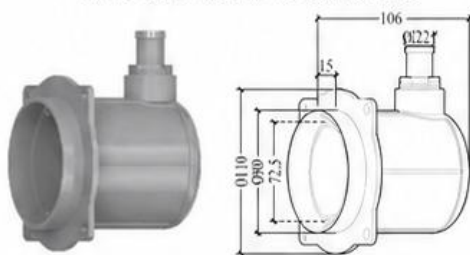

Concrete Pool Stainless Steel Niche/
Stainless Steel Niche for Steel Structure Pool
HJ-RC-SS110-SS/HJ-RC-SS110L-SS

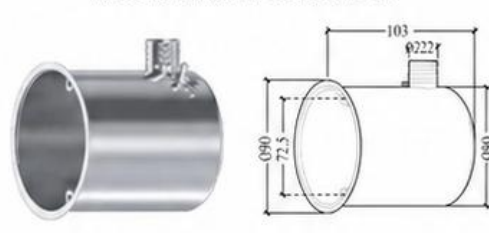

Product Features

Product Certifications: **IP68**, **CE**, **RoHS**

Built-in overheat protection system

Body Material: SS316L

Cable: 3X0.5mm²X2.5m

Lens Material: Tempered Glass

Beam Angle: HJ-RC-SS110: 120°

HJ-RC-SS110L: 15°, 30°, 45°, 60°

Model	Voltage	LED (Qty)	Power (W)	Lumen(LM)					Working Temperature -20°C~48°C	Controller
				3000K	4500K	6000K	RGB	RGBW		
HJ-RC-SS110	12V/24V (AC/DC)	69	5W	510	530	555	265	/	✓	WFC-AC01, WFC-DC01, WF-PLC1
HJ-RC-SS110L	12V/24V (AC/DC)	3	3W	318	333	345	171	203	✓	
			9W	935	988	1052	459	531	✓	
			18W	1656	1764	1890	/	/	✗	